

Volcano Rod Must Be Immersed in Water when used.

VOLCANO ROD

THE ELECTRIC SAND PILE HEATER heats all day while you work, **three** ways: 1) heat from the ground below **the** sand pile moves up through the sand: 2) heat **radiates from the water barrel in the center** of sand pile; and 3) heat lost through the top forms **a heated air shield** between the whole top surface of **the** sand and **the tarp.**

KEEPS SAND PILES FROM FREEZING

Built specifically for winter time masonry **use**, the heater constantly warms **water** and sand. The unit has an **internal thermostat which** will cycle on and off **intermittently** and **will** keep up to 5 tons of sand and 50 gallons of water hot when temperatures are as low as 1 degree below zero. The **cost** is estimated at only \$2.94 per day maximum, based on 7.5¢ per kilowatt hour; **actual cost** per day may vary.

SAVES LABOR

The unit will pay for itself in less than **TWO** cold weeks of! saved labor since employees do not spend 1-2 hours each, winter day **thawing the water** and sand pile.

INCREASES TIME FOR PRODUCTION

Masons can **immediately start** working because **the water** and sand are hot when (they arrive at work. Two hours saved on a cold morning in an 8 hour workday equals a >30% increase in available production time **that day- ***

COMPACT SIZE

Measuring only 16" x 38" x 1" and weighing less than 5 pounds, it can fit behind **the seat** of a pickup **truck**

BETTER QUALITY

No more scorched sand!

ONE PIECE, ALL STAINLESS STEEL CONSTRUCTION

Built for **ruggedness**, ease of transportation, and economy: the **electric sand pile heater** should **give you** years of service.



Figure 1. Dig a hole in the center of the sand pile large enough to insert a 55 gallon drum (as in figure 1) or dump sand over the barrel at delivery time. Brick, block, or rock can be heated using the same method-

Figure 2. Fill the 55 gallon drum approximately 3/4 full of water insert Volcano Rod (as in figure 2); plug into a 12-volt grounded outlet with ground fault interrupter. Heating will begin instantly. Do not energize the unit unless it is immersed in water. This will void the warranty

Figure 3. For best results, cover the sand pile with an insulated Tarp. An un-insulated tarp can be used but may not provide enough insulating factor in colder temperatures. If enough sand is not being heated, use a thicker insulating tarp, such as a concrete curing blanket- (These are sold at most contractor supply stores.)

Maximum temperature will be reached in approximately 6 to 12 hours and will be maintained as long as the unit is energized.

In colder temperatures, a larger mass can be heated by creating an airspace between the sand and the insulated tarp by placing bricks, blocks, or rocks on top of the sand before covering it with the tarp. This creates an airshaft for hot air to travel over the whole top surface of the sand pile, thus keeping a larger amount of sand warm.. Use a good quality tarp or curing blanket.

The Automatic Sand Heater is now set up and ready to work to provide a workable pile of sand and 50 gallons of hot mixing water ready, day after day.

NOTE;

Special care should be taken in hard water areas. Hard water deposits can build up on the heated end of the volcano rod. Operating the rod with excessive buildup can cause excessive internal overheating and shorten the life of the unit. It is suggested that you remove this hard water build up with a mild acidic solution (such as vinegar), or you may use a wire brush to scrape it off. Never use an acidic solution stronger than vinegar for cleaning

SAFETY REMINDERS:

To reduce the risk of burns and shock, be sure the power is off and the heater has cooled before handling.

Always unplug the volcano rod and allow it to cool before attempting to clean the unit.

Any trace of chemical admixtures will void the warranty.

This unit must only be used in STEEL drums a clean water with no additional mixtures.

The Volcano Rod must always be immersed in water when used.

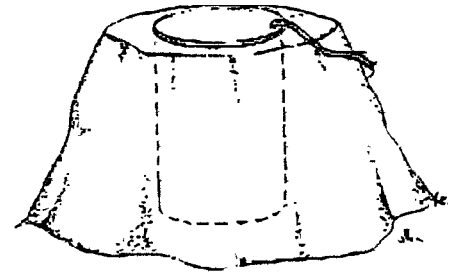


Figure 1

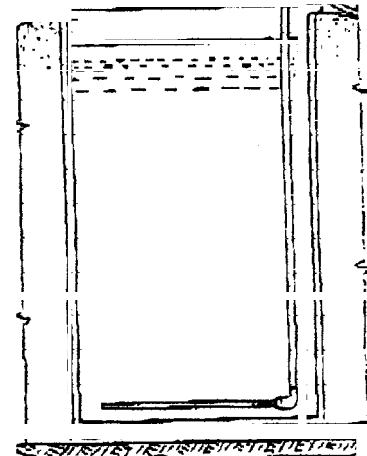


Figure 2

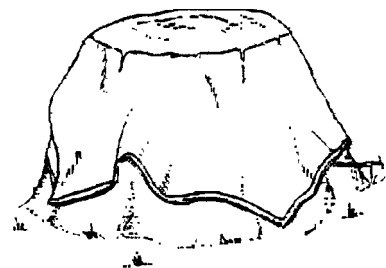


Figure 3

Volcano Rod
SAFETY PRECAUTIONS
PLEASE READ BEFORE USAGE

To reduce the risk of burns and shock, be sure the power is off and the volcano rod heater has cooled before handling.

Do not leave unattended.

Use only with ground fault interrupter.

Do not handle cord or plug on volcano rod heater with wet hands.

Do not use if cord or plug is damaged, worn or broken.

When unplugging, pull on the plug rather than the cord.

Never use three pronged cords which have the third prong broken off.

Make sure grounding connections are secure.

Use an extension cord capable of carrying 15 Amps in the climate/temperatures where the volcano rod heater is being used.

Consult extension cord manufacturer.

Manufacturer is not responsible for use other than that intended.

Volcano Rod must always be immersed in water when used.